



LINK BOX TECHNICAL DATA SHEET

Drw. No. 05.08.07 Article No. 06807001/0

 Issued Date:
 10.05.2019

 Rev. Date:
 3.08.2021


 Rev.
 02

Туре	LB.P.E	. 3.1	
- Description	Three Phase Earthing Link Box for Single Cable		
- Designation	Pedestal		
- Bonding	Earthing N/A		
- Sheath Voltage Limiter			
- Phase No.		3	
Earth		1	
Drawing Number	05.08.07		
- Article No		06807001/0	
Electrical Characteristics			
- Rated Frequency	50/60	Hz	
- SVL Type (*)		N/A	
Protection Class		IP 67	
Material			
- Enclosure	Stainless Steel AISI304 (AISI316 optional)		
- Body Thickness (**)	2 mm		
- Cover Thickness	3 mm		
- Connection Links	10 μm Tinned Electrolytic Copper		
- Connection Links Dimension	40x10 mm (400 mm2)		
- Gasket	Silicone		
- Cable Glands	4x48 mm		
- Cable Glands Insulation	Silicone gasket & EPR tape		
- Insulation	Epoxy Support Insulator		
- Conductor Fixing	Conductor Flexconn - 95-400 mm2		
- Painting Process	Electro Static Polyester Powder Paint		
- Painting Code		RAL 7032	
- Labeling Material	Stainless Steel		
- Protection Cover		PET-G	
AC Impulse Test			
- Phase-to-Phase	N/A	kV	
- Phase-to-Earth	30	kV	
Voltage Withstand Test			
- AC	10	kV/1 min	
- DC	25	kV/5 min	
Short Circuit Test			
- Symmetrical	40	kA/1sec	
Internal Power Arcing Test (Symmetrical)	40	kA/0.1 sec	

^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.


^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

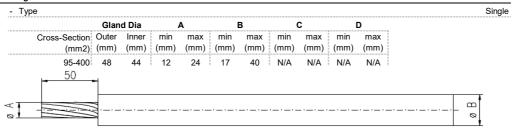

Ø.

Schematic Diagram

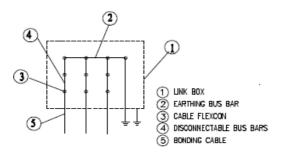

Enclosure Dimensions (*)

Width	630 mm		
Length	1005 mm		
Heigth	400 mm		
Weigth	83 kg		
Filling Compund (Optional)			
Volume	N/A		

^{*} Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

^{**} Given are approximate values. Actual values might sligthly differ.