



LINK BOX TECHNICAL DATA SHEET

Drw. No. 04.08.05 Article No. 05605001/0

 Issued Date:
 10.05.2019

 Rev. Date:
 4.08.2021


 Rev.
 02

	. E	. 1.1	
- Description One Phase Earthing Lini	One Phase Earthing Link Box for Single Cable		
- Designation	Wall Type		
- Bonding	Earthing N/A 1		
- Sheath Voltage Limiter			
- Phase No.			
Earth			
Drawing Number	04.08.05		
- Article No		05605001/0	
Electrical Characteristics			
- Rated Frequency	50/60	Hz	
- SVL Type (*)		N/A	
Protection Class		IP 66	
Material			
	Stainless Steel AISI304 (AISI316 optional)		
- Body Thickness (**)	2 mm		
- Cover Thickness	3 mm		
	10 μm Tinned Electrolytic Copper		
	40x10 mm (400 mm2)		
- Gasket	Silicone		
- Cable Glands	2x48 mm		
	Silicone gasket & EPR tape		
	Epoxy Support Insulator		
	Conductor Flexconn - 95-400 mm2		
	Electro Static Polyester Powder Paint		
- Painting Code	RAL 7032		
- Labeling Material	Stainless Steel		
- Protection Cover		PET-G	
AC Impulse Test			
- Phase-to-Phase	N/A	kV	
- Phase-to-Earth	37,5	kV	
Voltage Withstand Test			
- AC	20	kV/1 min	
- DC	25	kV/5 min	
Short Circuit Test			
- Symmetrical	50	kA/1sec	
Internal Power Arcing Test (Symmetrical)	40	kA/0.1 sec	


^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.

^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

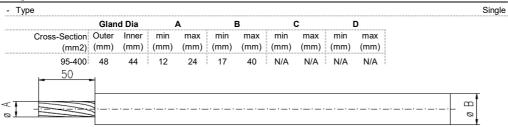

Schematic Diagram



Enclosure Dimensions (*)

Width	430 mm		
Length	550 mm		
Heigth	270 mm		
Weigth	28 kg		
Filling Compund (Optional)			
Volume	N/A		

Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation
 Given are approximate values. Actual values might sligthly differ.