



LINK BOX TECHNICAL DATA SHEET

Drw. No. 10.04.02 Article No. 12402001/0

Issued Date: 12.08.2021 Rev. Date: 00 Rev. LB.P.E . 3.1 Type - Description Three Phase Earthing Link Box for Coaxial Cable - Designation Pedestal - Bonding Earthing - Sheath Voltage Limiter N/A - Phase No. 3 Earth 1 **Drawing Number** 10.04.02 - Article No 12402001/0 **Electrical Characteristics** - Rated Frequency Hz - SVL Type (*) N/A **Protection Class** IP 67 Material - Enclosure Stainless Steel AISI304 (AISI316 optional) - Body Thickness (**) - Cover Thickness - Connection Links 10 µm Tinned Electrolytic Copper - Connection Links Dimension 50x10 mm (500 mm2) - Gasket Silicone - Cable Glands 3x89 mm & 1x48 mm - Cable Glands Insulation Silicone gasket & EPR tape **Epoxy Support Insulator** - Conductor Fixing Coaxial Flexconn - 400-500 mm2 - Painting Process Electro Static Polyester Powder Paint - Painting Code RAL 7032 - Labeling Material Stainless Steel - Protection Cover PET-G AC Impulse Test - Phase-to-Phase N/A k\/ - Phase-to-Earth 62,5 kV Voltage Withstand Test - AC 20 kV/1 min - DC 25 kV/5 min **Short Circuit Test** kA/1sec - Symmetrical 63

Internal Power Arcing Test (Symmetrical)


40

kA/0.1 sec


^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.

^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

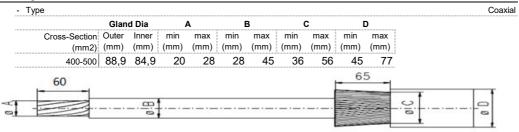

Schematic Diagram

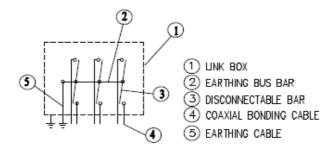

Enclosure Dimensions (*)

Width	940 mm	
Length	1203 mm	
Heigth	470 mm	
Weigth	180 kg	
Filling Compund	(Optional)	
Volume	N/A	

^{*} Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

^{**} Given are approximate values. Actual values might sligthly differ.