



LINK BOX TECHNICAL DATA SHEET

Drw. No. 18.09.02 Article No. 22502001/0

 Issued Date:
 12.08.2021

 Rev. Date:


 Rev.
 00

| Туре | LB. U . SB .3SA . 3 . 1 | | |
|--|--|--|--|
| - Description | S.Point Bonding Link Box with Transparent Window for Coaxial Cable | | |
| - Designation | Underground | | |
| - Bonding | Single Poin qty 3 3 1 18.09.02 | | |
| - Sheath Voltage Limiter | | | |
| - Phase No. | | | |
| Earth | | | |
| Drawing Number | | | |
| - Article No | 22502001/0 | | |
| Electrical Characteristics | | | |
| - Rated Frequency | 50/60 Hz | | |
| - SVL Type (*) | Up to 10 kV / Optional | | |
| Protection Class | IP 68 | | |
| Material | | | |
| - Enclosure | Stainless Steel AISI304 (AISI316 optional) | | |
| - Body Thickness (**) | 2 mm | | |
| - Cover Thickness | 3 mm | | |
| - Connection Links | 10 µm Tinned Electrolytic Coppe | | |
| - Connection Links Dimension | 40x10 mm (400 mm2) | | |
| - Gasket | | | |
| - Cable Glands | | | |
| - Cable Glands Insulation | | | |
| - Insulation | Epoxy Support Insulator | | |
| - Conductor Fixing | Coaxial Flexconn - 95-400 mm2 | | |
| - Painting Process | Electro Static Polyester Powder Paint RAL 7032 Stainless Steel | | |
| - Painting Code | | | |
| - Labeling Material | | | |
| - Protection Cover | PET-G | | |
| AC Impulse Test | | | |
| - Phase-to-Phase | | | |
| - Phase-to-Earth | 40 kV | | |
| Voltage Withstand Test | | | |
| - AC | 20 kV/1 min | | |
| - DC | 25 kV/5 min | | |
| Short Circuit Test | | | |
| - Symmetrical | 50 kA/1sec | | |
| | | | |
| Internal Power Arcing Test (Symmetrical) | N/A | | |


^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.

^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

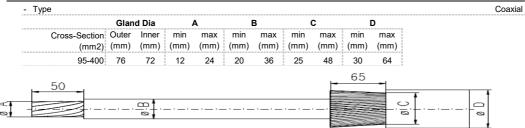

Schematic Diagram

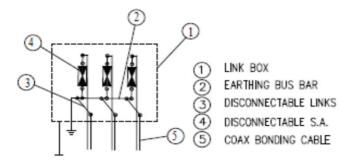

Enclosure Dimensions (*)

| Width | 690 mm | |
|--------------------|------------|--|
| Length | 670 mm | |
| Heigth | 354 mm | |
| | | |
| Weigth | 80 kg | |
| | | |
| Filling Compund (C |)ptional) | |
| Volume | 57 lt (**) | |
| | | |

^{*} Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

 $^{^{\}star\star}$ Given are approximate values. Actual values might sligthly differ.