



LINK BOX TECHNICAL DATA SHEET

Drw. No. 04.08.04 Article No. 05604001/0

 Issued Date:
 10.05.2019

 Rev. Date:
 3.08.2021


 Rev.
 02

Туре	LB. W . E .1SA . 1 . 1		
- Description	One Phase Earthing Link Box for Single Cable		
- Designation	Wall Type		
- Bonding	Earthing qty 1		
- Sheath Voltage Limiter			
- Phase No.			
Earth	1		
Drawing Number	04.08.04		
- Article No	05604001/0		
Electrical Characteristics			
- Rated Frequency	50/60 Hz		
- SVL Type (*)	Up to 18 kV / Optional		
Protection Class	IP 66		
Material			
- Enclosure	Stainless Steel AlSI304 (AlSI316 optional)		
- Body Thickness (**)	2 mm		
- Cover Thickness	3 mm		
- Connection Links	10 μm Tinned Electrolytic Copper		
- Connection Links Dimension	40x10 mm (400 mm2)		
- Gasket	Silicone		
- Cable Glands	2x48 mm		
- Cable Glands Insulation	Silicone gasket & EPR tape		
- Insulation	Epoxy Support Insulator		
- Conductor Fixing	Conductor Flexconn - 95-400 mm2		
- Painting Process	Electro Static Polyester Powder Paint		
- Painting Code	RAL 7032		
- Labeling Material	Stainless Steel		
- Protection Cover	PET-G		
AC Impulse Test			
- Phase-to-Phase			
- Phase-to-Earth	37,5 kV		
Voltage Withstand Test			
- AC	20 kV/1 min		
- DC	25 kV/5 min		
Short Circuit Test			
- Symmetrical	N/A		
Internal Power Areing Tool (Summetrical)	40 kA/0.1 sec		
Internal Power Arcing Test (Symmetrical)	40 kA/0.1 sec		

^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.


^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

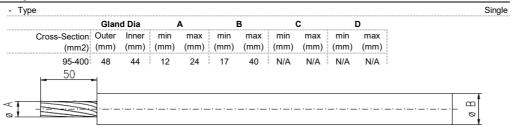

Ø.

Schematic Diagram



Enclosure Dimensions (*)

Width	430 mm	
Length	550 mm	
Heigth	270 mm	
Weigth	28 kg	
Filling Compund (Optional)		
Volume	N/A	

^{*} Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

^{**} Given are approximate values. Actual values might sligthly differ.