



LINK BOX TECHNICAL DATA SHEET

Drw. No. 14.02.01 Article No. 17001001/0

 Issued Date:
 12.10.2021

 Rev. Date:

 Rev.
 00

Туре	LB. U . SB .3SA . 6 . 1		
- Description	Three Phase S.Point Bonding Link Box for Single Cable		
- Designation	Underground		
- Bonding	Single Point qty 3 6		
- Sheath Voltage Limiter			
- Phase No.			
Earth	1 14.02.01		
Drawing Number			
- Article No	17001001/0		
Electrical Characteristics			
- Rated Frequency	50/60 Hz		
- SVL Type (*)	Up to 10 kV / Optional		
Protection Class	IP 68		
Material			
- Enclosure	Stainless Steel AISI304 (AISI316 optional)		
- Body Thickness (**)	2 mm		
- Cover Thickness	3 mm		
- Connection Links	10 μm Tinned Electrolytic Copper		
- Connection Links Dimension	50x10 mm (500 mm2)		
- Gasket	Silicone		
- Cable Glands	6x48 mm & 1x48 mm		
- Cable Glands Insulation	Silicone gasket & EPR tape & Mastic Tape & Heat Shirinkable Tube		
- Insulation	Epoxy Support Insulator		
- Conductor Fixing	Conductor Flexconn - 300-500 mm2		
- Painting Process	Electro Static Polyester Powder Paint		
- Painting Code	RAL 7032		
- Labeling Material	Stainless Steel		
- Protection Cover	PET-G		
AC Impulse Test			
- Phase-to-Phase	75 kV		
- Phase-to-Earth	40 kV		
Voltage Withstand Test			
- AC	20 kV/1 min		
- DC	25 kV/5 min		
Short Circuit Test			
- Symmetrical	63 kA/1sec		
Internal Power Arcing Test (Symmetrical)	40 kA/0.1 sec		

^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.


^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation






LINK BOX TECHNICAL DATA SHEET

Bonding Cable



Schematic Diagram

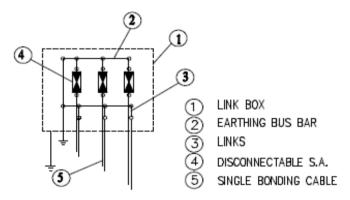

Enclosure Dimensions (*)

Width	690 mm	
Length	670 mm	
Heigth	389 mm	
Weigth	85 kg	
Filling Compund (Optional)		
Volume	N/A	

^{*} Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

^{**} Given are approximate values. Actual values might sligthly differ.